

























1  
2

**Figure 3: CTA Railcar Customer Survey Findings**

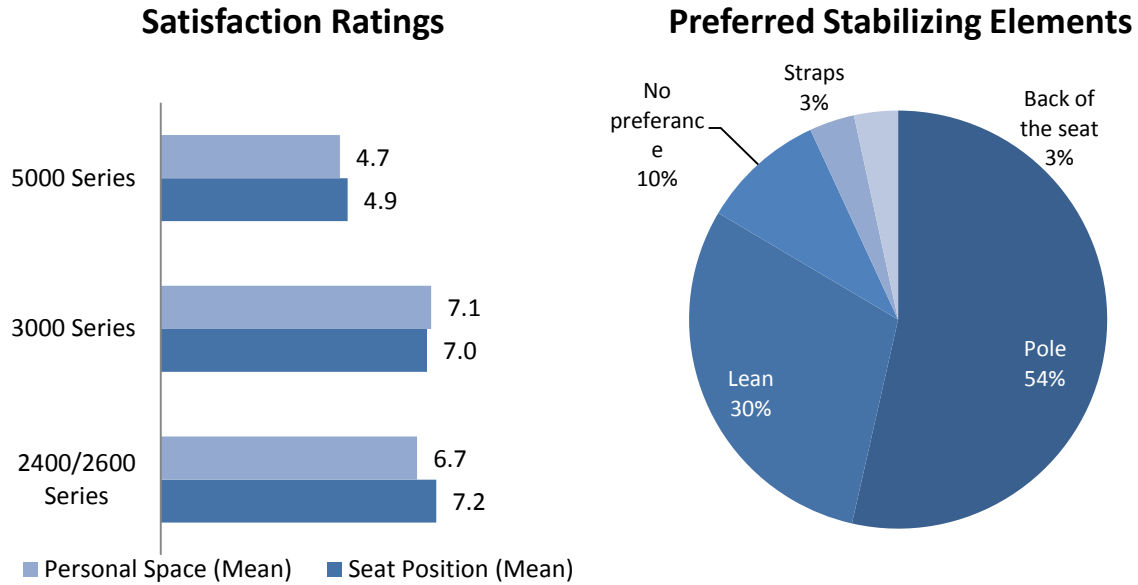

3

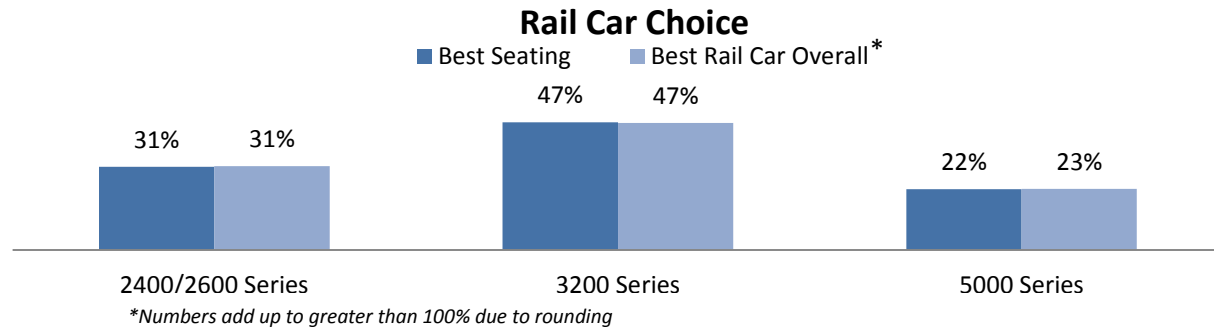

4  
5  
6

Each of the rail cars has different features that appeal to different customers. The customers were then shown the same three photographs side by side, and were asked to choose which of the rail cars they would most prefer to ride in, and which seating layout they liked best. The scores for seating layout and rail car preference were near identical, which is displayed in Figure 3.

7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

Customers were asked to choose which seating design they liked best. They were also asked to state which rail car they preferred overall. Forty-seven percent of the customers said they liked the 3200 seating layout the best. This railcar type was also liked by 47 percent of respondents. They state that they like the chances of sitting by themselves in the single seats. Customers also mention the general spaciousness, standing space, and walking room of this car. Finally, customers say they appreciate the availability of a lot of poles as a reason for their choice. Just under one-third (31%) of customers chose the 2400/2600 series seat layout. When asked about which rail car the customers liked overall, 31% chose this car. These customers say they like the number of seats available in the car. These customers also state that these cars provide a chance for more privacy if they're able to find a seat. This was observed especially with customers who sit next to the window, where they are out of the way of others. Finally, 22% of the customers liked the 5000 series seat layout. Nearly one-quarter (23%) of the customers liked this car

1 overall. Customers state that these cars provide a feeling of safety from others. The fact that  
2 their backs were against the wall allows customers to watch others within the car, and can ride  
3 without the fear of burglary. Customers who prefer the 5000 series also state that it's easier to  
4 get on and off the train, and provides the greatest number of options for stabilization when  
5 standing.

6  
7 Customer survey results indicate that narrow railcars like the CTA fleet benefit from a 2 x 1  
8 transverse seating style, especially in the middle of the car. People taking shorter trips are more  
9 likely to move into the car if they have steady support infrastructure and if they are able to  
10 quickly make their way toward the doors in crowded conditions. Overall, transverse seating is  
11 strongly preferred over longitudinal seats, more so in the center of the car where an individual  
12 may have to sit between two people, creating discomfort.

## 13 14 **MAJOR TAKEAWAYS AND LESSONS**

15  
16 Each component of this study assisted CTA planners to understand the most important features  
17 of different railcar types. Most customers prefer to sit in transverse seats and dislike taking a spot  
18 between two seats in the longitudinal seating arrangement. Standees prefer sturdy support  
19 structures such as vertical and horizontal poles to stabilize themselves. They are more willing to  
20 move into the center of the car if these stabilizing elements exist and they are able to move  
21 relatively easily in crowded conditions.

22  
23 Passenger observations and capacity analysis helped connect the customer feedback with  
24 onboard activity during peak period.


- 25 • The 2400/2600 series cars provided few stabilizing options in the center aisle and fewer  
26 people were inclined to move inward if no seats were available. Crowded areas around  
27 the doors increased dwell times at stations. Even though the maximum capacity of the  
28 railcar was high, the car felt more crowded with fewer people onboard.
- 29 • In comparison, 3200 series cars provide more comfort and alternatives to standees at the  
30 cost of four seats. 2 x 1 staggered seating in the center aisle facilitates easier passenger  
31 flow and less crowded conditions near the doors. 3200 series cars also had the shortest  
32 dwell time at stations and reached maximum capacity loads similar to 2400/2600 series  
33 cars without feeling as crowded.
- 34 • 5000 series have two ADA spots at one end of the car with horizontal and vertical  
35 support structure not seen in the old trains. This area is able to hold a lot of standees more  
36 comfortably than other railcars. However, the center aisle's increased width is not utilized  
37 as anticipated and the long longitudinal seating is fully occupied on longer journeys.  
38 People taking short trips choose not to seat even if they would prefer a seat over standing.  
39 Overall, this railcar type had lower observed capacity when compared to the other types.

40  
41 Railcar seating is dependent upon many design, safety, and mechanical factors. For example,  
42 some seats have to be longitudinal to accommodate equipment under them. It may not be  
43 possible to implement every suggestion or finding of this study, but the results help piece  
44 together a more efficient and comfortable railcar. The following suggestions were made to rail  
45 engineering for consideration:


- 46 • The 3200-series car should be the starting point for the center of the car. Seating should  
47 be asymmetrical with a mix of single seats and seat pairs. Pole locations should be offset

- 1 as well. The transverse seats are preferred by CTA customers while the asymmetrical  
 2 seats and poles maximize capacity and enable effective passenger flow.  
 3 • The new 5000 series offer good support elements in open spots, such as the pole and  
 4 strap setup found in the ADA area. This area showed better capacity and customer  
 5 comfort in the 5000-series than the 3200-series which lacked stabilization mechanisms.  
 6 Some ceiling mounted stabilization in the center of the ADA area should be added as  
 7 well. This small area is currently lacking even in the 5000-series.  
 8 • More transverse seats in the non-cab side of the car are recommended with a 2 x 2  
 9 layout, as seen in the 2400/2600 series cars. This arrangement provides the maximum  
 10 number of forward-facing seats in an area that will not impede passenger flow.  
 11 • The front end of the car near the cab is recommended with 4 x 4 longitudinal seats in the  
 12 small section of the car. These seats will satisfy the customers that prefer them and the  
 13 location will not impede passenger flow.

14 **Figure 4: Proposed 7000 Series Railcar Configurations**

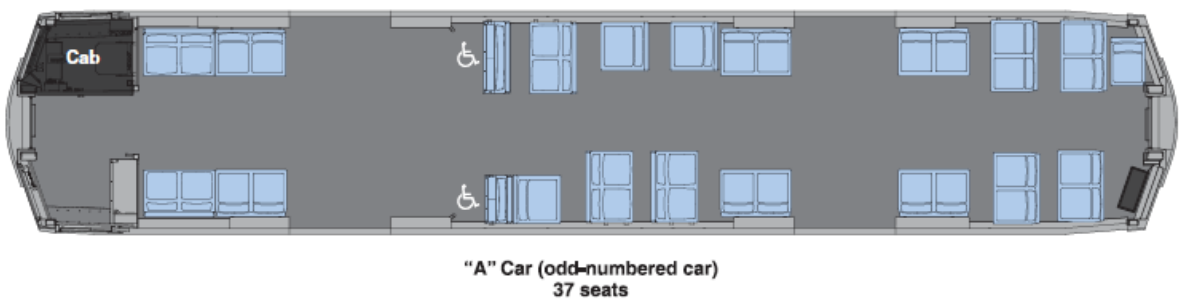

15  
16

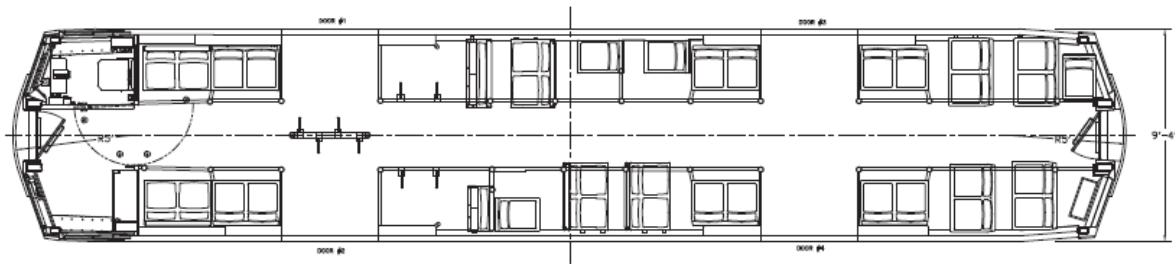

17  
18  
19

Source: CTA IFB to Purchase Rapid Transit Cars Specification CTA 7000-12 Addendum 13 – Attachment G

20

21 **CONCLUSION**

22

23 Chicago Transit Authority studied customer behavior, analyzed dwell times, and sought  
 24 customer feedback on seating arrangement to inform railcar design for the future 7000 series  
 25 cars. A unique comparison between transverse and longitudinal seating was possible on the rail  
 26 system as the new 5000 series rail cars feature longitudinal seats; a departure from the current  
 27 transverse seating on 2400/2600 and 3200 railcars. The study aimed to compare the rail car  
 28 interior on the basis of peak hour capacity, passenger flow, station dwell times, and customer  
 29 feedback. Each rail car contains elements that prove beneficial to the customer experience and  
 30 operational performance of the car.

31

32 The study suggests that the 7000 series railcars feature mainly transverse seats based on the  
 33 3200-series layout in the center of the car, which is currently most liked by the customers. Each

1 end of the car is recommended a layout similar to 5000-series in the front end and 2400/2600  
2 series on the back end. A small number of longitudinal seats provide luggage space under the  
3 railcars, and gives an opportunity for customers who value these seats for safety reasons a  
4 comfortable place to sit. A 2x1 transverse layout in the center of the car facilitates movement and  
5 allows more people to stand away from the doors, reducing dwell times. The back end of the car  
6 with 2 x 2 seats maximizes seating, which customers like.

7  
8 Since railcar design is garnering more attention as transit agencies seek to overhaul their aging  
9 equipment, this study has implications beyond Chicago. In context of previous work, it provides  
10 customer feedback and analysis that question whether longitudinal seating is able to achieve  
11 capacity gains promised by theoretical calculations. Each component of this study suggests there  
12 is no evidence that more standing room can necessarily increase railcar capacity. To the contrary,  
13 railcars with transverse seating achieved almost 8 percent more capacity during peak period.  
14 However, CTA rolling stock is constrained in its width and other agencies with different railcar  
15 dimensions are encouraged to conduct similar observed railcar capacity studies between different  
16 rail type configuration to further understand the effectiveness of seating layout on capacity,  
17 comfort and train operations.

18  
19  
20

## 1 REFERENCES

- 2
- 3 (1) Transportation Research Board (2003). Rail Transit Capacity from *TCRP Report 100: Transit Capacity and Quality of Service Manual – 2<sup>nd</sup> Edition*, Retrieved from
- 4 <http://onlinepubs.trb.org/onlinepubs/tcrp/tcrp100/part%205.pdf> on July 24, 2013.
- 5
- 6
- 7 (2) Bay Area Rapid Transit. New Train Car Project. Retrieved from
- 8 <http://www.bart.gov/about/projects/cars/index.aspx> on July 29, 2013.
- 9
- 10 (3) Bialick, Aaron. Muni to Test Seat Reconfiguration to Make More Room on Light-Rail
- 11 Vehicles. In *SF Streetsblog*, September 18, 2013. Retrieved from
- 12 [http://sf.streetsblog.org/2013/09/18/muni-to-test-seat-reconfiguration-to-make-more-](http://sf.streetsblog.org/2013/09/18/muni-to-test-seat-reconfiguration-to-make-more-room-on-light-rail-vehicles/)
- 13 [room-on-light-rail-vehicles/](http://sf.streetsblog.org/2013/09/18/muni-to-test-seat-reconfiguration-to-make-more-room-on-light-rail-vehicles/) on September 19, 2013.
- 14
- 15 (4) Bierman, Noah. MBTA to experiment with nearly seatless subway cars. In *Boston Globe*,
- 16 December 4, 2008. Retrieved from
- 17 [http://www.boston.com/news/local/breaking\\_news/2008/12/mbta\\_to\\_experim.html](http://www.boston.com/news/local/breaking_news/2008/12/mbta_to_experim.html) on
- 18 July 29, 2013.
- 19
- 20 (5) Washington Metropolitan Area Transit Authority. 7000 Series Railcar Program Contract
- 21 Award, March 25, 2010. Retrieved from
- 22 [http://www.wmata.com/about\\_metro/board\\_of\\_directors/board\\_docs/032510\\_37000Prese-](http://www.wmata.com/about_metro/board_of_directors/board_docs/032510_37000PresentationwithResolutions032510.pdf)
- 23 [ntationwithResolutions032510.pdf](http://www.wmata.com/about_metro/board_of_directors/board_docs/032510_37000PresentationwithResolutions032510.pdf) on July 29, 2013.
- 24
- 25 (6) Berkovich, Aaron et al (2012). Observed Customer Seating And Standing Behaviors and
- 26 Seat Preferences Onboard Subway Cars in New York City. Transportation Research
- 27 Board. Retrieved from <http://docs.trb.org/prp/13-1693.pdf> on July 15, 2013.
- 28
- 29 (7) Puong, Andre. Dwell Time Model and Analysis for the MBTA Red Line, March 30,
- 30 2000. Retrieved from [http://dspace.mit.edu/bitstream/handle/1721.1/35716/1-258JFall-](http://dspace.mit.edu/bitstream/handle/1721.1/35716/1-258JFall-2003/NR/rdonlyres/Civil-and-Environmental-Engineering/1-258JPublic-Transportation-Service-and-Operations-PlanningFall2003/D9613FBC-9279-4F31-A46D-8DB2E037E9E4/0/a3_dwelltim.pdf)
- 31 [2003/NR/rdonlyres/ Civil-and-Environmental-Engineering/1-258JPublic-Transportation-](http://dspace.mit.edu/bitstream/handle/1721.1/35716/1-258JFall-2003/NR/rdonlyres/Civil-and-Environmental-Engineering/1-258JPublic-Transportation-Service-and-Operations-PlanningFall2003/D9613FBC-9279-4F31-A46D-8DB2E037E9E4/0/a3_dwelltim.pdf)
- 32 [Service-and-Operations-PlanningFall2003/D9613FBC-9279-4F31-A46D-](http://dspace.mit.edu/bitstream/handle/1721.1/35716/1-258JFall-2003/NR/rdonlyres/Civil-and-Environmental-Engineering/1-258JPublic-Transportation-Service-and-Operations-PlanningFall2003/D9613FBC-9279-4F31-A46D-8DB2E037E9E4/0/a3_dwelltim.pdf)
- 33 [8DB2E037E9E4/0/a3\\_dwelltim.pdf](http://dspace.mit.edu/bitstream/handle/1721.1/35716/1-258JFall-2003/NR/rdonlyres/Civil-and-Environmental-Engineering/1-258JPublic-Transportation-Service-and-Operations-PlanningFall2003/D9613FBC-9279-4F31-A46D-8DB2E037E9E4/0/a3_dwelltim.pdf) on July 30, 2013.
- 34
- 35 (8) Transportation Research Board (2003). Rail Transit Capacity from *TCRP Report 100: Transit Capacity and Quality of Service Manual – 2<sup>nd</sup> Edition*, Retrieved from
- 36 <http://onlinepubs.trb.org/onlinepubs/tcrp/tcrp100/part%205.pdf> on July 24, 2013.
- 37
- 38
- 39 (9) Transportation Research Board (1996). *TCRP Report 13: Rail Transit Capacity*,
- 40 Retrieved from [http://onlinepubs.trb.org/onlinepubs/tcrp/tcrp\\_rpt\\_13-a.pdf](http://onlinepubs.trb.org/onlinepubs/tcrp/tcrp_rpt_13-a.pdf) on July 20,
- 41 2013.
- 42