

1 **DESIGNING AND DEMONSTRATING AN ELECTRIC ROAD SYSTEM FOR**  
2 **EFFICIENT AND SUSTAINABLE ROAD FREIGHT**

3  
4  
5 **Patrik Akerman, Corresponding Author**

6 Siemens AG  
7 Postbox 32 40, 91050 Erlangen, Germany  
8 Tel: +49 172 7351509; Email: [patrik.akerman@siemens.com](mailto:patrik.akerman@siemens.com)

9  
10 **Hasso Georg Gruenjes**

11 Siemens AG  
12 Postbox 32 40, 91050 Erlangen, Germany  
13 Tel: +49 173 2778387; Fax: +49 9131 746170; Email: [hasso.gruenjes@siemens.com](mailto:hasso.gruenjes@siemens.com)

14  
15 **Michael Lehmann**

16 Siemens AG  
17 Postbox 32 40, 91050 Erlangen, Germany  
18 Tel: +49 162 2895890; Fax: +49 9131 746170; Email: [lehmann.michael@siemens.com](mailto:lehmann.michael@siemens.com)

19  
20  
21 Word count: 253 words Abstract, 5247 words text + 8 Figures x 250 words (each)  
22 = 7500 words

23  
24  
25  
26  
27  
28  
29 Submission Date: 15.11.201

**1 ABSTRACT**

2 To meet constraints faced by road freight in terms of significantly lowering or reducing CO<sub>2</sub>  
3 emissions and improved air quality an Electric Road System (ERS), based on an Overhead Contact  
4 Line (OCL)-hybrid heavy-duty vehicle (HDV), has been designed, developed, tested and  
5 demonstrated. The ERS demonstrated has twice the energy efficiency of conventional diesel  
6 HDVs and enables usage of renewable energy. The technological development was made possible  
7 by combining expertise from rail electrification, electric drives and a newly developed active  
8 current collector for dynamically connecting to the OCL and receiving a continuous supply of  
9 electricity to power the engine and store energy on-board. The research project demonstrated that a  
10 hybrid truck can run in pure electric mode without any change in the operations for the driver and  
11 without concessions on truck performance. The ERS infrastructure was successfully integrated  
12 into a highway environment. The result was the first fully operable prototype on a test track with  
13 dedicated infrastructure. During trials, the OCL-hybrid prototypes demonstrated full performance  
14 and suitability for everyday use. In addition to providing highly promising technological results,  
15 the tests also demonstrated benefits to the environment and economy. The ERS can be integrated  
16 with existing infrastructure, thus making it easier and cheaper to implement and maintain. Lower  
17 energy consumption yields lower operating costs and the resulting savings can finance the  
18 infrastructure investment. These aspects are currently being demonstrated on public roads. This  
19 paper presents the latest results and points the way to a heavy-duty road freight system with full  
20 electric power and full flexibility.

21

22

23

24

25 *Keywords: dynamic charging, heavy-duty, HEV (hybrid electric vehicle), infrastructure, truck*

## 1. BACKGROUND

### 1.1. The challenge of road freight CO<sub>2</sub> emissions

Transport remains the end-sector most dependent on fossil fuels, with oil accounting for more than 90% of its primary energy. According to Sims et al. (1) transport is a leading source of green-house gases (GHG), with passenger surface transport being the largest sub-component. However, a recent forecast by the Organisation for Economic Co-operation and Development (OECD) (2) points to a shift, with emissions from freight surface transport growing much faster than those of passenger surface transport, rising from currently 40% to a forecasted 58% share of surface transport emissions by 2050. Within freight transport, the majority of CO<sub>2</sub> is emitted by road freight, and its share is forecasted to grow.

To counter the trend of growing road freight emissions a study of the German Advisory Council on the Environment (SRU) (3) examined, what positive environmental effects could be achieved through existing policy options, such as expansion of rail capacity, improved logistics and more efficient vehicles (e. g. aerodynamic optimization) as well as the use of bio-fuels as part of the propulsion fuel. The conclusion was that this set of measures will be insufficient to reach the goal of reducing GHG emissions by at least 80%.

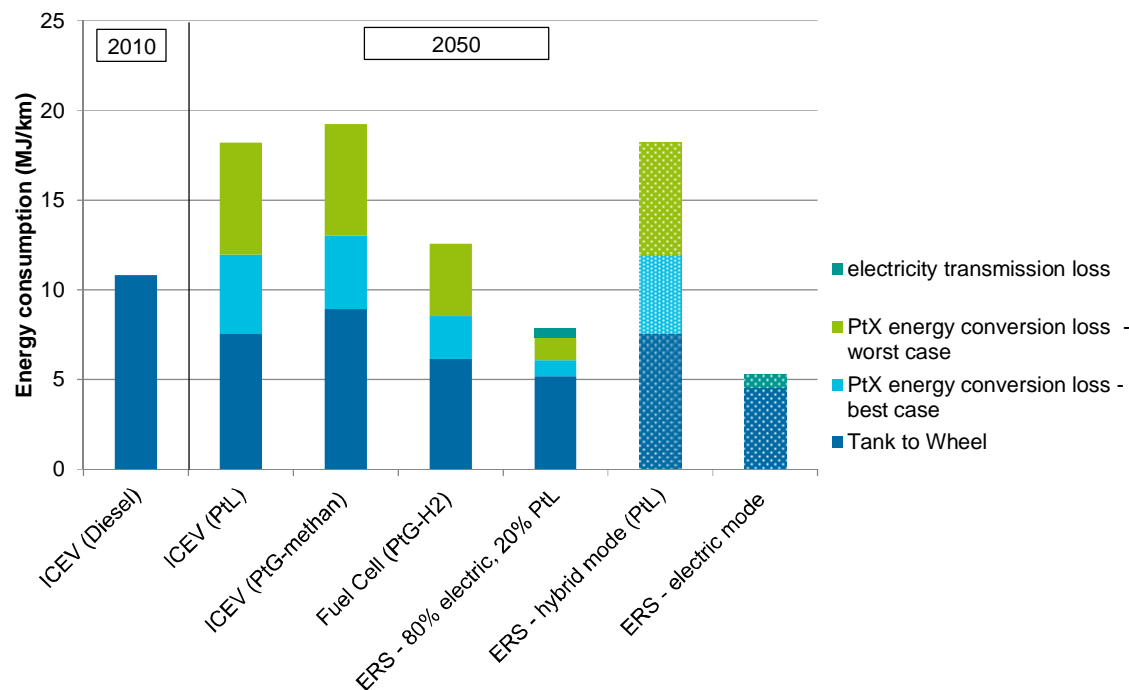
Furthermore the International Food Policy Research Institute IFPRI (4) has concluded that bio-fuels are likely to have limited availability, especially when considering those that don't have any incremental land use change or other effects that negate their CO<sub>2</sub>-reduction potential. If so, it would then be more beneficial to apply this limited supply of sustainable bio-fuel to air or sea transport, that are even more challenging to electrify. According to Jaffe et al. (5) natural gas (in compressed or liquefied form) is another alternative, but its potential to reduce CO<sub>2</sub> is very small even under optimal conditions. If solutions cannot be found to address methane leakage from production, transmission and distribution and the net effect could even be negative. Therefore additional solutions to significantly reducing the CO<sub>2</sub> foot-print of the road freight sector are needed.

Given that several countries already have very low carbon footprint for electricity and that global electricity generation will need to decarbonize over the coming decades as part of climate mitigation measures as shown by the International Energy Agency IEA (6), it makes sense to explore solutions using electricity in road freight transport, especially since any such solution could take significant time to reach maturity and broad adaption. Further immediate benefits of an electric solution are improved local air quality, fuel diversification and increased energy efficiency as well as reduced operating costs. This much is already known, explaining today's significant world-wide interest and support for the development of electric solutions for personal transport and urban freight. The central question this paper addresses is how the benefits of electricity can be applied to heavy road freight and to sharply reverse its current trend of growing total emissions.

### 1.2. Alternative ways to use renewable electricity for road freight

The most common approach to use renewable electricity for road freight is on-board battery storage. This makes sense for vehicles that are light, travel short distances, have regular stops or a lot of idle time that can be used for battery charging. The demands in long haul road freight are much more challenging, with heavy loads, long distances and few regular stops. To illustrate this, typically one kilogram of battery is needed per tonne-kilometer with current technologies. This would imply for a 40 ton truck travelling 500 km, a 20 t battery would be needed (7). In addition to the weight constraint, there is also the challenge of how such a battery could be charged quickly, without diminishing its useable life or disrupting the grid. Consequently, for heavy goods transport

1 over longer distances, operation with only on-board electrical energy storage looks unlikely, even  
 2 under highly optimistic future battery development forecasts.  
 3 Another way to use renewable electricity is electrolysis to create hydrogen for use in fuel cells. A  
 4 similar approach is known as Power-to-Gas where the hydrogen created also undergoes  
 5 methanation. According to Zoerner (8) both of these processes are associated with notable losses.  
 6 Using estimates for electricity distribution (95%), and for electrolysis (70%), hydrogen  
 7 distribution (91%), fuel cell (55%), on-board power electronics and electric machine (79%) as  
 8 shown by the BMUB (9) the well-to-wheel efficiency of hydrogen fuel cell vehicles is around 27%.  
 9 Studies by the Hessian Ministry for Environment, Nature, Agriculture and Consumer Protection  
 10 (10) as well as by IVECO (11) show that for Power-to-Gas the same assumptions for electricity  
 11 distribution and electrolysis apply, while methanation (80%) and distribution of Compressed  
 12 Natural Gas (CNG) (98%) and CNG combustion (35%) mean that the well-to-wheel efficiency is  
 13 around 19%.  
 14 If, however, electricity can be brought directly to the vehicle, losses would be limited to those of  
 15 electricity distribution and the on-board power electronics and electric machine, yielding a  
 16 well-to-wheel efficiency of 76%. Figure 1 offers an illustration of the energy consumption of the  
 17 different pathways for electric energy in heavy road freight. Such differences in efficiency also  
 18 translate into equally significant differences in cost of operation (e.g. cost per driven km). A  
 19 natural step is therefore to investigate the various ways in which electricity can be brought directly  
 20 to the vehicle on the road, powering its propulsion. This step is analogous to electrification of rail,  
 21 which has been undertaken on those routes where a sufficient high utilization can be expected, i.e.  
 22 on the main corridors or on intensely used shuttle tracks. The same kinds of applications, i.e. where  
 23 traffic is going back and forth or on highways with very high number of vehicles, could benefit  
 24 most from electric road technology.



25  
 26  
 27

**FIGURE 1 Energy Efficiency of Trucks 2050 (12)**

### 1 **1.3. Concepts for Electric Roads Systems (ERS)**

2 There are several technologies enabling electricity to be transferred from the road to vehicles at  
3 standstill. In heavy freight applications energy consumption is very high, stops are few and  
4 irregular and on-board battery storage highly unlikely to be sufficient. Therefore battery-based  
5 solutions are inadequate. Electricity will need to be continuously provided to the vehicle while  
6 moving.

7 Solutions with dynamic and continuous charging have been described by Tongur (13) as ERS. So  
8 far there are three main kinds of solutions proposed: inductive in the roadway, conductive in the  
9 road surface and conductive from an overhead contact line (OCL).

10 Installing infrastructure for electrification in the roadway or surface poses substantial challenges.  
11 Most obviously the road needs to be dug up, which means a significant disruption to the traffic  
12 flow. Given that the places where one would want to install ERS are places with a lot of traffic,  
13 these locations are also highly undesirable to disrupt. Another challenge comes from ensuring that  
14 the installed infrastructure will function without active maintenance or repair just as long as the  
15 service intervals for the road surface itself. Anything less would mean added disruptions and  
16 economic costs. Equally important, the installation should not increase the maintenance needed for  
17 the road itself.

18 A further important challenge concerns safety. This is most obvious for conductive systems in the  
19 road surface, which would change the grip of the road surface for all driving on it. For electrical  
20 safety reasons in-road solutions –both inductive and conductive- consist of short segments, e. g. by  
21 the Viktoria Swedish ICT (14) 20 m or even shorter depending on the vehicle length of the shortest  
22 vehicles running on the electrified lanes. These segments can only be activated when a single  
23 suitable vehicle is on top of it and thus preventing the transmitting section from being accessed by  
24 third-parties. For all other situations the segment needs to be deactivated. This makes these  
25 concepts complex. That increases investment cost and it also reduces reliability and availability  
26 due to the required detection and switching devices. According to Viktoria Swedish ICT (14) (15)  
27 the segment length also dictates the speeds which vehicles can be powered (between around 50-60  
28 km/h to around 90 km/h for segments of 20m), implying a trade-off between transferring power at  
29 higher and lower speeds for in-road ERS concepts.

30 To justify the costs it is important to have high energy efficiency and thus generate savings on  
31 operational costs. This requires that electricity can be transferred to a moving vehicle at a high  
32 level of efficiency. As shown by the BMUB (9) and the Viktoria Swedish ICT (15) the substation  
33 to wheel efficiency for conductive supply in the road has been shown to be around 79%. For  
34 inductive in the road with dynamic charging it is more difficult to establish overall efficiency  
35 which correspond to highway driving conditions (e.g. high speed, lateral misalignment, normal  
36 air-gap to road surface, etc). Viktoria Swedish ICT (14) looking specifically at inductive ERS did  
37 not report any results regarding efficiency while moving at highway speeds.

38 An OCL-ERS has advantages over in-road systems in terms of safety, reliability and efficiency. An  
39 argument against such a solution is that only large vehicles could use such a system. First, it should  
40 be noted that maybe this restriction is equally true for inductive systems. When Highways England,  
41 as part of their study into ERS (16), asked system suppliers for a solution that could be used by  
42 both cars and trucks not a single reply in the affirmative was received. Secondly, having an ERS  
43 HDVs does not mean that LDVs cannot be electrified. In fact alternative solutions, such as BEV,  
44 already exist for light duty vehicles and are steadily coming into the market. Most importantly,  
45 even if an ERS for all kinds of vehicles was technically feasible and desirable, it is not clear that  
46 the economics would favour anything other than HDVs using it. ERS makes sense for vehicles  
47 with both a high annual energy consumption, which could result in savings to pay for the vehicle

1 investment, and a concentrated driving pattern, which could ensure high utilization of the  
2 infrastructure necessary to pay for the investment. KTH, a Swedish University, made a PESTEL  
3 analysis (17), looking at which use cases made sense for ERS and their conclusion was that ERS  
4 would be attractive for heavy trucks and busses, but not general car traffic.

#### 5 **1.4. Overview of an electric road system using overhead contact line**

6 The developed OCL-ERS utilizes a continuous power supply system. This electric transport  
7 system consists of an overhead contact line (catenary) infrastructure as well as trucks equipped  
8 with current collectors (pantographs) and hybrid drives, see Figure 2.

9 It combines the advantages of proven technologies from rail and road systems and is an open,  
10 scalable and reliable system for electrified road transport. Designed as an overlay system it  
11 improves the existing road infrastructure without interfering with the structure and its  
12 conventional users. Furthermore it enhances the transport operation while providing unlimited  
13 flexibility due to the hybrid configuration of the vehicles. Compared to e.g. diesel operated trucks,  
14 the ERS-adapted trucks increase their energy efficiency in truck operation significantly and have  
15 the opportunity to utilize renewable power instead of fossil fuels. Such operational savings can be  
16 used to finance the capital investment and thus offer a business case supporting the implementation  
17 and application of the technology. The German Environmental Protection Agency calculated that  
18 an OCL-ERS installed on the German Autobahn (highway) system would not only be cheaper than  
19 the other investigated zero emission options but also be cheaper than diesel (18). The primary  
20 challenge they saw was the need for cross-border (e.g. pan-European) coordination.

21



22  
23

24 **FIGURE 2 Hybrid truck in electric operation on public road in Sweden.**

25

1 To support that development, a forward-looking concept like this has to prove its feasibility in  
 2 terms of:

- 3 • Applied technologies
- 4 • Economic benefits
- 5 • Achievement of ecologic targets

6 The subsequent sections present major results of the research project ENUBA (Elektromobilität  
 7 bei schweren Nutzfahrzeugen zur Umweltentlastung von Ballungsräumen – electric mobility  
 8 concepts for heavy-duty vehicles for the environmental relief of conurbations) which was  
 9 co-funded by the Germany Federal Ministry for Environment (BMUB) and Siemens AG, to  
 10 evaluate the technical, ecological and economical feasibility. Based on these results the paper  
 11 furthermore provides an overview on the focused transport applications and international  
 12 opportunities.

## 13 2. TECHNICAL SOLUTION AND FUNCTIONALITY

14 Similarly to typical electrical traffic systems the OCL-ERS comprises of four sub-systems: the  
 15 electrical vehicle/truck, the traction power supply and distribution, the roadway and an operation  
 16 control center, see Figure 3. The following sections describe these sub-systems in further detail.  
 17



18  
 19

20 **FIGURE 3 The OCL-ERS and its sub-systems.**

21

### 22 2.1. Electric infrastructure – from generation to distribution

23 The electric infrastructure of the OCL-ERS consists of substations supplying the traction power and an overhead contact line distributing the traction power to the consumers (trucks).

24 The electric infrastructure is erected alongside the road and has no direct interference with the road itself. Consequently there are no restrictions to mixed operation with other non-electrified vehicles.  
 26

1 As the trucks are not guided by the system the wear and tear of the road is similar to conventionally  
2 used roads.

3 The substations include standard components as medium voltage and direct current (DC)  
4 switchgears, large-capacity power transformers and a rectifier. According to the Viktoria Swedish  
5 ICT (15) the distance between the substations varies from 1-3 kilometers depending on the power  
6 rating of the substations and the electric traffic assumptions. Furthermore the substations can be  
7 equipped with controlled inverters. Instead of generating waste heat while braking the  
8 ERS-adapted trucks generate electric power. This process is called regenerative braking and  
9 widely used in tramway and railway systems. By applying inverters this energy can flow back into  
10 the public grid via the overhead contact line and the substations. Even without the inverter  
11 technology, braking energy can be used to recharge on-board energy storage devices or to feed  
12 other trucks connected to the same substation contact line feeding section.

13  
14 Similarly to trolley bus systems the OCL is designed as a bipolar system. This is due to the fact,  
15 that in contrast to rail bound systems, the roadway cannot be used as electric conductor for the  
16 return current. The contact line is suspended by single poles standing on both sides of the roadway,  
17 each of them carrying the contact line to supply one direction. This configuration can be adapted to  
18 the specific needs of the environment in which the system is integrated (e. g. use of portals).  
19 The trucks are equipped with a current collector (pantograph) positioned above and behind the  
20 driver's cabin (see section 2.2). Corresponding with the operational range of these current  
21 collectors the two parallel poles of the OCL are installed above the electrified lane. Each of the  
22 wire systems is providing one electric pole and consists of a contact wire and a messenger wire.  
23 The height of the system is designed to be above standard vehicle dimensions and clearances. The  
24 horizontal position of the OCL along the roadway is, amongst others, assured by tensioning  
25 devices installed inside or outside the masts supporting the overhead contact line system. This  
26 prevents sagging of the lines and ensures minimum wear of the carbon contact strips of the  
27 pantograph even at high speeds. At civil structures with limited clearances (such as e.g. bridges,  
28 tunnels) and to assure the required electrical safety distances the OCL can be interrupted or special  
29 constructions can be applied (e.g. rigid contact line systems, reduced system heights).

30



31

32

33 **FIGURE 4 Active Pantograph to connect with an Overhead-Contactline.**






















1 **2.2. Trucks with intelligent pantograph and hybrid drive**

2 The OCL-ERS technology is open for any electric vehicle that is equipped with a suitable  
 3 pantograph. Consequently, different hybrid and full electric drive trains and propulsion systems can  
 4 be used.

5 The key component which allows for combining the advantages of proven technologies from rail  
 6 infrastructure and road systems is the newly developed pantograph, which can be seen in Figure 4.  
 7 It enables the ability of safely connecting and disconnecting with the overhead contact line within  
 8 the speed range of 0 to 90 km/h. Furthermore the pantograph actively compensates the lateral  
 9 movement of the vehicle within the lane by using a system of sensors and actuators. Next to the  
 10 mechanical and electrical design, intense research efforts have been invested in the detection of the  
 11 contact line and the processing of the data provided by the integrated sensors. Additionally a  
 12 human-machine-interface (HMI) and a diagnostic and configuration system were developed for  
 13 the interaction with the driver.

14 The ERS-adapted truck runs in hybrid (e.g. diesel) mode on the “first mile” until reaching the  
 15 electrified section of its route. After entering the electrified section the truck connects to the  
 16 overhead contact line at any highway speed. Upon connection, the hybrid drive (e.g. diesel engine)  
 17 automatically switches off and the electric drive is directly supplied with energy from the contact  
 18 line. When overtaking or driving into sections which are not electrified the vehicle is changing to  
 19 hybrid drive propulsion mode without loss of traction force at any speed. Energy storage on the  
 20 vehicle bridges the time required for restarting the diesel engine or allows for driving short  
 21 passages (e.g. low bridges) without OCL or diesel operation. It is also possible to charge the  
 22 on-board electrical energy storage while driving, thus making it possible to be fully charged when  
 23 leaving the OCL.

24 The wide range of drive train technologies that can be integrated with the Catenary Hybrid concept  
 25 is shown in Figure 5.

Truck types	Drive system	On-board source of electricity	Combustion engine	Non-electrical source of energy
 Tractor truck (2 axles)	 Parallel-hybrid	 Battery (small)	 Engine (small)	 Diesel
 Tractor truck (3 axles)	 Serial-hybrid	 Battery (medium)	 Engine (medium)	 Bio-fuel
 Rigid truck (2 axles)	 Full electric	 Battery (large)	 Engine (large)	 CNG/LNG
 Rigid truck (3 axles)		 Fuel cell		 H <sub>2</sub>
 Rigid truck (4 axles)				

26  
27

28 **FIGURE 5 Possible Configurations of Vehicles for an ERS.**

29

30 This allows the ERS concept to be tailored to different users’ demands, be it a port concerned with  
 31 zero emissions or a mining operator desiring a strong diesel engine for use on the non-electrified  
 32 sections in tough climatic environments. This flexibility also allows the ERS to be integrated with  
 33 a range of different vehicles and vehicle manufacturers to accommodate specific user and vehicle  
 34 manufacturers’ demands

## 1 2.3. Roadway

2 The technical concept was thoroughly evaluated in eleven workshops together with experts of the  
3 German Federal Highway Research Institute (BAST - Bundesanstalt für Straßenwesen). During  
4 this process detailed concepts for the following aspects were developed and evaluated:  
5

### Civil Infrastructure

- Road Clearance and contact line construction at bridges
- Heavy load transports with heights up to 4.5 m
- Statics of contact line systems and poles
- Statics of bridges
- Requirements for road restraint systems
- Visibility of road signs

### Construction, Operation & Maintenance

- Construction concept
- Maintenance concept
- Technical monitoring and authorisation
- Incidence management
- Ice loads and hazards (including mitigation)

### Electrical Infrastructure

- Integrated electrical safety concept for infrastructure and vehicles
- Integrated EMC concept for infrastructure and vehicles
- Emergency Energy Shut-Down

### Vehicle Technology

- Change of vehicle driving dynamics
- Change of vehicle crash characteristics
- Change of vehicle fire safety aspects
- Limitations for hazardous loads
- Increased vehicles lengths by 0,5 m to accommodate pantograph

## 6 2.4. Operating System

7 The operation of the system is structured in three main elements: infrastructure, logistics and user  
8 management. Similar to railway electrification infrastructure, the OCL-ERS infrastructure is  
9 operated via an operation and control center (OCC). From within the OCC the status of the system,  
10 substations and OCL, can be monitored and switching operations can be executed.

11 In terms of logistics, the system focuses on the traffic of vehicles rather than on the movement of  
12 individual goods. The initial process is the registration of the users, the trucks. This process can be  
13 supported by access control (e.g. via automatic number plate recognition gate entries) and law  
14 enforcement mechanisms. Wayside monitoring and signalling as well as centralized operation  
15 control allow for traffic optimization measures.

16 On-board and wayside metering of energy consumption provides the basis for processing of  
17 invoices, depending on the type of application. Differences may exist in a public and open set-up  
18 with individual customers or in a rather semi-private set-up with one owner of a larger fleet, e.g. in  
19 mining transport.

20 These concepts are backed up with practical experiences collected e.g. in rail and road  
21 infrastructure projects and the OCL-ERS test facilities.

## 22 3. RELIABILITY, AVAILABILITY & SAFETY

23 The reliability and availability of any system is the result of the combination of the individual  
24 reliability and availability of its subsystems and components. The availability of the components is  
25 strongly influenced by the preventive and reactive maintenance applied. Here again the OCL-ERS  
26 benefits from the fact that it comprises of proven technologies from today's rail and road systems,  
27 for which extensive knowledge and experience is already available.

1 The power supply infrastructure can be realized as a redundant system. In case of an outage of one  
 2 substation feeding of the overhead contact line can be taken over by the neighbouring  
 3 substation(s).

4 The contact line system can be equipped with intelligent monitoring devices that can detect contact  
 5 failures. In the unlikely event of contact line failures these devices immediately trip the protection  
 6 relays and switch off the power supply of the damaged section to assure electric safety. In case of  
 7 an accident in the electrified section with or without involvement of an electric truck the OCL-ERS  
 8 can be de-energized by the rescuing firemen or police staff. This is realized with a safe and  
 9 self-explanatory measuring, switch-off and earthing unit located at the road for usage by rescuing  
 10 staff. Signalling devices and enforcement functionalities (e.g. pantograph monitoring system) will  
 11 increase the already high safety level.

12 As initially explained, the OCL-ERS does not directly interfere with the road infrastructure.

13 Consequently the system has no impact on the reliability and availability of the road itself.

14 The ultimate purpose of the system remains to facilitate transport operation. In addition to the high  
 15 degree of reliability, availability and safety of the infrastructure, the OCL-ERS safeguards the  
 16 unhampered truck operation by the choice of drive system. Even in a case of infrastructure outage  
 17 or malfunction of the pantograph the trucks remain fully operable and may proceed in hybrid drive  
 18 mode.

#### 19 **4. TECHNICAL MATURITY**

20 In addition to careful analysis of system functionality as well as safety and reliability it is  
 21 necessary to test the full system and obtain real world data.

22 A short design phase of only six months was followed by three months for construction of the  
 23 infrastructure and integration of the pantograph into the hybrid truck. Afterwards all subsystems  
 24 were thoroughly tested under standard and exceptional conditions.

25 When evaluating the technologic maturity of the OCL-ERS the infrastructure components and the  
 26 vehicle in general can be regarded to be proven technologies. The described infrastructure for  
 27 substations and OCL is available and does not differ significantly from standard railway products.  
 28 Moreover the trucks and the major on-board equipment are also available now. The key innovation  
 29 of the OCL-ERS system is the pantograph. The pantograph has been tested extensively, see  
 30 Table 1.

31

32 **TABLE 1 Overview of executed tests**

33

Test Run / Test Process	Amount/ Distance
Number of test runs	3000
Distance electrically driven on the test track	3000 km
Distance driven in diesel hybrid operation on the test track	4500 km
Distance driven in diesel hybrid operation on public roads	10000 km
Emergency braking processes at various speeds	100
Test runs driving over obstacles of various sizes	200
Night drives	70
Test runs with trailer (total weight of truck: 40 metric ton)	700

1  
2 The technical maturity of the OCL-ERS can be best described as follows:  
3 Based on theoretical concepts, the pantograph design took shape in a process of extended  
4 laboratory tests and resulted in three prototypes which could be mechanically, electrically and  
5 control wise integrated in three test vehicles. Two standard 18 t trucks equipped with hybrid drive  
6 systems and loaded with ballast were used as test vehicles, seen in Fig. 3. The most recent tests are  
7 performed with a third vehicle in a truck and trailer set-up, see Fig 2. A test facility for the  
8 OCL-ERS was build up. After a short commissioning phase the pantograph and the OCL-ERS as a  
9 whole were tested intensely on the test track and proved to be working reliably under the given  
10 environmental and traffic conditions. Next to a series of test cases successfully performed, a  
11 multitude of demonstration runs were executed over the last years, see Table 1.  
12 Based on the testing results under a large variety of traffic, loading and environmental conditions  
13 the general functionality of the OCL-ERS is proven.  
14 The evaluation process helped to identify all relevant aspects to be considered for integration of the  
15 OCL-ERS infrastructure in public roads. Based on these findings design guidelines were derived.  
16 Furthermore the test facility was enhanced and now includes a curved section as well as additional  
17 infrastructure typical for German highways, such as road signs and gantries, see Figure 6.  
18



19  
20

21 **FIGURE 6** New test facility.

## 22 **5. SYSTEM EFFICIENCY**

23 As for all transport systems one of the most important characteristic values is the energy  
24 consumption. From in-feed at the substation to the wheel on the trucks, the OCL-ERS benefits  
25 from a high system efficiency ranging from 80 – 85 %, like other electric mass transit systems.  
26 This should be compared with standard diesel trucks, which are bound to the lower efficiencies of

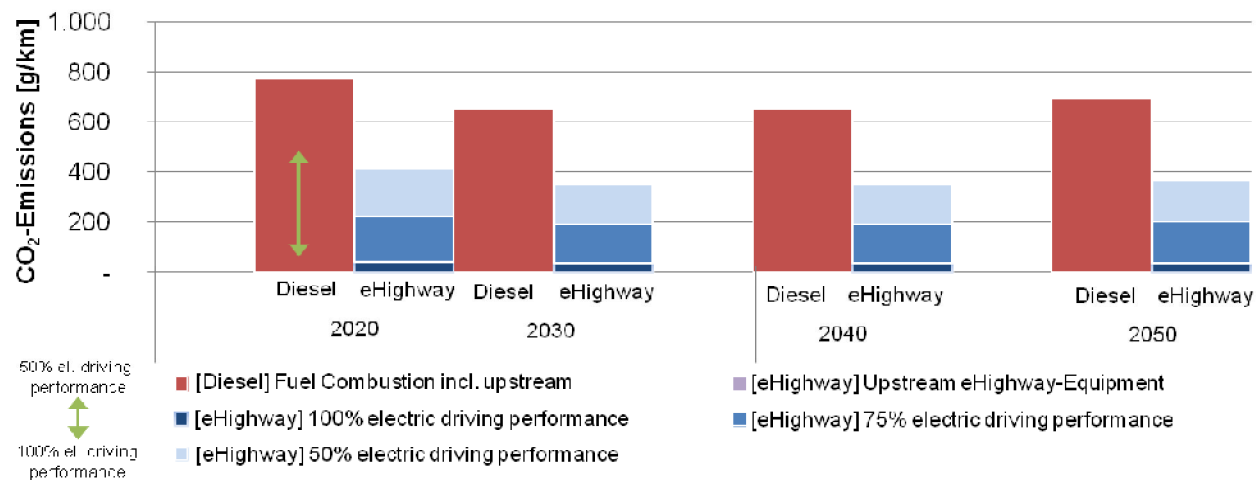
1 internal combustion engines ranging from 35 – 42 %. Additional benefits result from the ability of  
 2 electric vehicles to recuperate energy while braking or cruising down-hill.

3 As part of the field testing comprehensive long-term measurements were conducted. Trucks at  
 4 50 % payload (i.e. 28 t) ran on more than 2,000 km of highway sections at different grades.

5 Standard diesel trucks consume about 25 - 29 l / 100 km. This is equivalent to 2.6 - 3.0 kWh/km.

6 The electric truck consumed 1.4 kWh/km and therefore proves the fundamental relation between  
 7 drive train efficiency and energy consumption.

8 In addition to the improved air quality achieved by eliminating local emissions caused by  
 9 diesel-engines, the IEA (6) has shown that the above demonstrated efficiency gains can also  
 10 translate into global reductions of CO<sub>2</sub>; so long as the CO<sub>2</sub>-footprint of power generation is lower  
 11 than 594 g CO<sub>2</sub>/ kWh the OCL-ERS will bring a net reduction in CO<sub>2</sub> emissions. As power  
 12 generation decarbonizes, the OCL-ERS allows those gains also to further bring down the  
 13 emissions associated with heavy-duty road freight. The ENUBA2 project report (19) investigated  
 14 the potential CO<sub>2</sub> reductions from an OCL-ERS, looking both over time and considering different  
 15 assumptions regarding the share of miles driven while connected to the OCL, see Fig. 7.  
 16



17  
 18  
 19 **FIGURE 7** Comparison of CO<sub>2</sub>-Emissions diesel and electric driving (19).  
 20

## 21 6. ONGOING RESEARCH AND OUTLOOK

22 Motivated by the positive results that prove the technical, economical and ecological feasibility of  
 23 the OCL-ERS, the publically funded research work is continuing. Therefore the last part of the  
 24 paper highlights:

- 25 • Focus fields of application
- 26 • International opportunities
- 27 • Cooperation with truck manufacturers

28 The OCL-ERS is an open system suitable for a variety of applications, amongst others:

- 29 • Shuttle service for bulk cargo transport with dedicated vehicles (e.g. connecting mines  
 30 with shared facilities, intra- or interplant shuttle operation).
- 31 • Shuttle service for cargo transport (e.g. containers) with multiple operators  
 32 (e.g. connecting ports with freight traffic centers).
- 33 • General application on public roads for long distance transports.

1 In the next step, the technology is being demonstrated on public roads. The first such case is in  
2 Sweden. There Trafikverket, the Swedish Transport Administration, has conducted a  
3 pre-commercial procurement process (PCP) for heavy-duty electric road demonstrations. The  
4 Trafikverket definition of “electric road” comprises any dynamic electric power transfer to  
5 vehicles, which can be done either continuously or in segments. Heavy-duty vehicles in this  
6 context can be either busses or trucks weighing at least 16 metric tons. The Swedish OCL-ERS  
7 project takes places on 2 km section of a public road connecting the port city of Gävle with heavy  
8 industry facilities in the hinterland. A two-year demonstration period was started in June 2016.  
9 Another public road project is being funded by the South Coast Air Quality Management District  
10 (SCAQMD). That one mile project in Southern California was triggered by the report of Gladstein,  
11 Neandross & Associates (20) into the possibilities of Zero Emission transport between the ports  
12 and the rail yards. One of the trucks in that demonstration project will come from Mack, a U.S.  
13 subsidiary of the Volvo Group.

14 For the PCP project and for the second phase of the ENUBA research project Siemens has a  
15 development partnership with Scania, a European truck manufacturer that is part of the  
16 Volkswagen Group. The second development phase started in 2012 and still ongoing aimed at  
17 further system optimizations towards automotive product standards. The major task was to  
18 significantly reduce the pantograph dimensions and weight. The integration of the pantograph on  
19 the Scania truck was successfully executed and tests are being performed. An important future step  
20 will be to further standardize the interface between pantograph and vehicle, thus facilitating  
21 integration of pantograph on trucks from different OEMs.

22 In December 2014 the cabinet of the German federal government BMUB (21) and BMWI (22)  
23 approved plans including a field trial of the ENUBA system before the end of the legislative period,  
24 i.e. September 2017. A call was subsequently issued and as of July 20, 2016, the received  
25 proposals were under evaluation.

26 In conclusion, the ENUBA research project has successfully demonstrated that OCL-ERS is a  
27 realistic alternative for addressing the challenge of sustainable road freight. The next phase,  
28 consisting of bringing the system to public roads for further evaluation, is already under way.

29

### 30 **ACKNOWLEDGMENTS**

31 Funding support from the German Ministry of Environment for the ENUBA research and  
32 development projects.

**REFERENCES**

1. Sims, R., R. Schaeffer, F. Creutzig, X. Cruz-Núñez, M. D'Agosto, D. Dimitriu, M. J. Figueroa Meza, L. Fulton, S. Kobayashi, O. Lah, A. McKinnon, P. Newman, M. Ouyang, J. J. Schauer, D. Sperling, and G. Tiwari, 2014: Transport. In: Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Edenhofer, O., R. Pichs-Madruga, Y. Sokona, E. Farahani, S. Kadner, K. Seyboth, A. Adler, I. Baum, S. Brunner, P. Eickemeier, B. Kriemann, J. Savolainen, S. Schlömer, C. von Stechow, T. Zwickel and J.C. Minx (eds.)].
2. OECD/ITF (2015), ITF Transport Outlook 2015, OECD Publishing, Paris/ITF, Paris. DOI: <http://dx.doi.org/10.1787/9789282107782-en>. Accessed Jul. 22, 2015.
3. Sachverständigenrat für Umweltfragen (SRU) [Editor] (2012): Verantwortung in einer begrenzten Welt, Umweltgutachten 2012, Berlin. [http://www.umweltrat.de/SharedDocs/Downloads/DE/01\\_Umweltgutachten/2012\\_06\\_04\\_Umweltgutachten\\_HD.html?nn=395728](http://www.umweltrat.de/SharedDocs/Downloads/DE/01_Umweltgutachten/2012_06_04_Umweltgutachten_HD.html?nn=395728). Accessed Jul. 22, 2015.
4. IFPRI, 2011, David Laborde, Assessing the Land Use Change Consequences of European Biofuel Policies, Final Report, Washington : International Food Policy Institute (IFPRI), 2011.
5. Jaffe, A. M., R. Dominguez-Faus, A. Lee, K. Medlock, N. Parker, D. Scheitrum, A. Burke, H. Zhao, and Y. Fan, Exploring the Role of Natural Gas in U.S. Trucking, NextSTEPS White Paper. 2015. <http://steps.ucdavis.edu/files/02-18-2015-NextSTEPS-White-Paper-Natural-Gas-in-US-Trucking-18Feb2015-Public-Release.pdf>. Accessed Feb. 27, 2015.
6. IEA (International Energy Agency) (2014): Energy Technology Perspectives 2014, OECD/IEA, Paris. ISBN 9789264208001.
7. Fraunhofer ISI. (2012). Technologie Roadmap Energiespeicher für Elektromobilität 2030. Karlsruhe: Fraunhofer ISI
8. Zoerner, T. (25. 03 2013). Entwicklung der Netzverluste in Deutschland. <https://www.proteus-solutions.de/~Unternehmen/News-PermaLink:tM.F04!sM.NI41!Article.955326.asp>. Accessed on March 25, 2016.
9. BMUB. (2014). Erneuerbar mobil. Berlin: BMUB.
10. Hessian Ministry for Environment, Nature, Agriculture and Consumer Protection (November 2013). H2BZ. [http://www.h2bz-hessen.de/mm/Wind-Wasserstoff\\_geschuetzt.pdf](http://www.h2bz-hessen.de/mm/Wind-Wasserstoff_geschuetzt.pdf). Accessed on March 25, 2016.
11. IVECO. (18. 01 2010). Stralis-CNG. [http://lehrerfortbildungbw.de/bs/berufsbezogen/fahrzeugtechnik/material/2009\\_02\\_sympnutzfg/doc/iveco/STRALIS-CNG\\_ES\\_2010-01-18\\_deutsch.pdf](http://lehrerfortbildungbw.de/bs/berufsbezogen/fahrzeugtechnik/material/2009_02_sympnutzfg/doc/iveco/STRALIS-CNG_ES_2010-01-18_deutsch.pdf). Accessed May 03, 2014.
12. Oeko-Institut. (2016). Webinar: Decarbonisation of Heavy Road Transport. Berlin: Oeko-Institut.

- 1 13. Tongur, S., Engwall, M., The business model dilemma of technology shifts. *Technovation*  
2 (2014), <http://dx.doi.org/10.1016/j.technovation.2014.02.006i> Accessed on March 25,  
3 2016.
- 4 14. Viktoria Swedish ICT; Slide-in Electric Road System, Inductive project report 2013a.  
5 [https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-](https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-in_inductive_project_report_draft_phase_1_2013-10-18.pdf)  
6 [in\\_inductive\\_project\\_report\\_draft\\_phase\\_1\\_2013-10-18.pdf](https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-in_inductive_project_report_draft_phase_1_2013-10-18.pdf). Accessed on March 25,  
7 2016.
- 8 15. Viktoria Swedish ICT; Slide-in Electric Road System, Conductive project report 2013b.  
9 [https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-](https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-in_conductive_project_report_draft_phase_1_2013-10-18.pdf)  
10 [in\\_conductive\\_project\\_report\\_draft\\_phase\\_1\\_2013-10-18.pdf](https://www.viktoria.se/sites/default/files/pub/www.viktoria.se/upload/publications/slide-in_conductive_project_report_draft_phase_1_2013-10-18.pdf). Accessed on March 25,  
11 2016.
- 12 16. Highways England, Feasibility study: Powering electric vehicles on England's major roads  
13 (2015), PR42/15  
14 [http://assets.highways.gov.uk/specialist-information/knowledge-compendium/2014-2015/](http://assets.highways.gov.uk/specialist-information/knowledge-compendium/2014-2015/Feasibility+study+Powering+electric+vehicles+on+Englands+major+roads.pdf)  
15 [Feasibility+study+Powering+electric+vehicles+on+Englands+major+roads.pdf](http://assets.highways.gov.uk/specialist-information/knowledge-compendium/2014-2015/Feasibility+study+Powering+electric+vehicles+on+Englands+major+roads.pdf). Accessed  
16 on March 25, 2016.
- 17 17. Meijier, Sebastiaan, FABRIC Conference Presentation Identifying first deployment  
18 feasibility: separating unrealistic from real options, accessible at  
19 [http://www.fabric-project.eu/images/Presentations/midterm\\_event/4.\\_FABRIC\\_Conferen-](http://www.fabric-project.eu/images/Presentations/midterm_event/4._FABRIC_Conference_Session_1._20160202_FABRIC_Feasibility_Sebas_v2.pdf)  
20 [ce\\_Session\\_1.\\_20160202\\_FABRIC\\_Feasibility\\_Sebas\\_v2.pdf](http://www.fabric-project.eu/images/Presentations/midterm_event/4._FABRIC_Conference_Session_1._20160202_FABRIC_Feasibility_Sebas_v2.pdf). Accessed on March 25,  
21 2016.
- 22 18. Umweltbundesamt, Postfossile Energieversorgungsoptionen (2015)  
23 [https://www.umweltbundesamt.de/sites/default/files/medien/378/publikationen/texte\\_30\\_](https://www.umweltbundesamt.de/sites/default/files/medien/378/publikationen/texte_30_2015_postfossile_energieversorgungsoptionen.pdf)  
24 [2015\\_postfossile\\_energieversorgungsoptionen.pdf](https://www.umweltbundesamt.de/sites/default/files/medien/378/publikationen/texte_30_2015_postfossile_energieversorgungsoptionen.pdf). Accessed on March 25, 2016.
- 25 19. Siemens AG. (2014). Ökonomische und ökologische Bewertung eines  
26 Oberleitungs-Hybrid Systems für schwere Nutzfahrzeuge. Erlangen: Siemens AG
- 27 20. Gladstein, Neandross & Associates (GNA) (2012): Zero-Emission Catenary Hybrid Truck  
28 Market Study, Santa Monica, CA.  
29 <http://www.gladstein.org/pdfs/ZETECHMarketStudy.pdf>. Accessed on March 25, 2016.
- 30 21. BMUB, 2014, Aktionsprogramm Klimaschutz 2020.  
31 [http://www.bmub.bund.de/fileadmin/Daten\\_BMU/Download\\_PDF/Aktionsprogramm\\_Kl-](http://www.bmub.bund.de/fileadmin/Daten_BMU/Download_PDF/Aktionsprogramm_Klimaschutz/aktionsprogramm_klimaschutz_2020_broschuere_bf.pdf)  
32 [imaschutz/aktionsprogramm\\_klimaschutz\\_2020\\_broschuere\\_bf.pdf](http://www.bmub.bund.de/fileadmin/Daten_BMU/Download_PDF/Aktionsprogramm_Klimaschutz/aktionsprogramm_klimaschutz_2020_broschuere_bf.pdf). Accessed on March  
33 25, 2016.
- 34 22. BMWI, 2014, Nationaler Aktionsplan Energieeffizienz (NAPE).  
35 [http://www.bmwi.de/BMWi/Redaktion/PDF/M-O/nationaler-aktionsplan-energieeffizien-](http://www.bmwi.de/BMWi/Redaktion/PDF/M-O/nationaler-aktionsplan-energieeffizienz-nape,property=pdf,bereich=bmwi2012,sprache=de,rwb=true.pdf)  
36 [z-nape,property=pdf,bereich=bmwi2012,sprache=de,rwb=true.pdf](http://www.bmwi.de/BMWi/Redaktion/PDF/M-O/nationaler-aktionsplan-energieeffizienz-nape,property=pdf,bereich=bmwi2012,sprache=de,rwb=true.pdf). Accessed on March  
37 25, 2016